


3-Way Cinema System

Variplex Matinee™ Crossover Installation Instructions




Fullrange: One Amp Channel System

- Step 1 - Assign switch to "Passive" on TL606M input panel
- Step 2 - Place jumper in "Passive Mode" on Variplex horn input panel
- Step 3 - Connect "Passive MF/HF Output" from TL606M input panel to the "Passive Input" on the Variplex horn
- Step 4 - Connect amp channel to "Input" on TL606M input panel

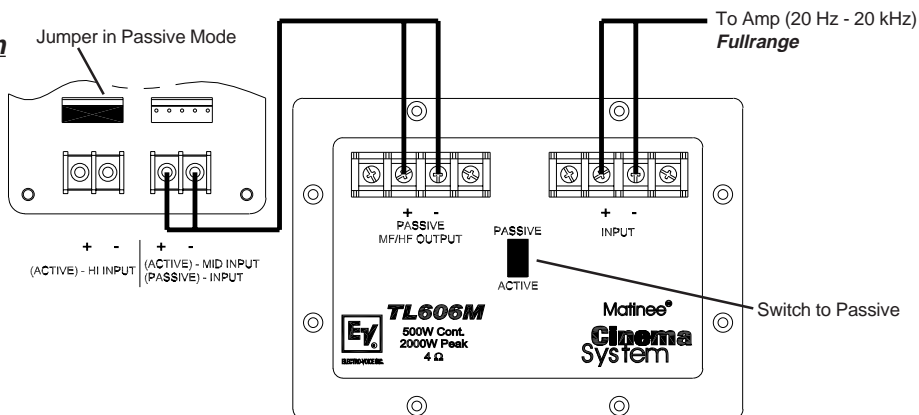


Biamp: Two Amp Channel System

- Step 1 - Assign switch to "Active" on TL606M input panel
- Step 2 - Place jumper in "Passive Mode" on Variplex horn input panel
- Step 3 - Connect LF amp channel to "Input" on TL606M input panel
- Step 4 - Connect Mid/Hi amp channel to "Passive Mode" on Variplex horn

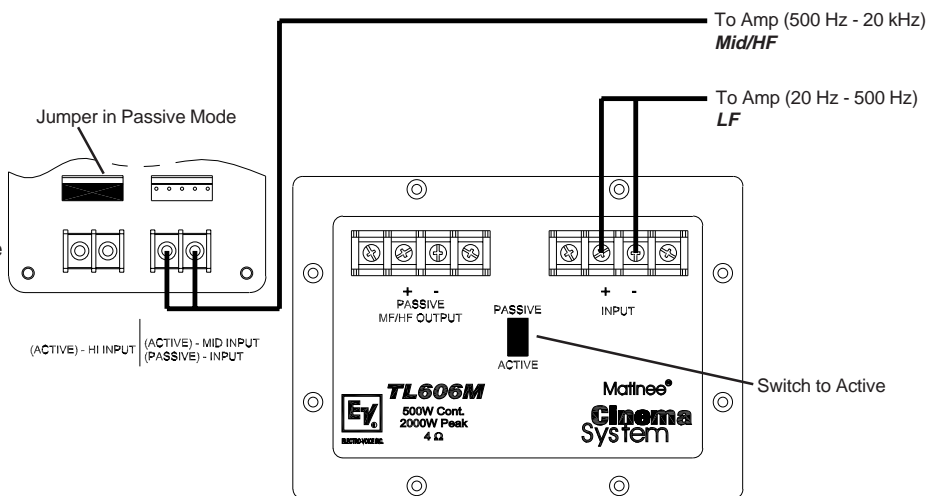

Triamp: Three Amp Channel System

- Step 1 - Assign switch to "Active" on TL606M input panel
- Step 2 - Place jumper in "Active Mode" on Variplex horn input panel
- Step 3 - Connect LF amp channel to "Input" on TL606M input panel
- Step 4 - Connect Mid amp channel to "Active Mid Input" on Variplex horn
- Step 5 - Connect High amp channel to "Active HF Input" on Variplex horn

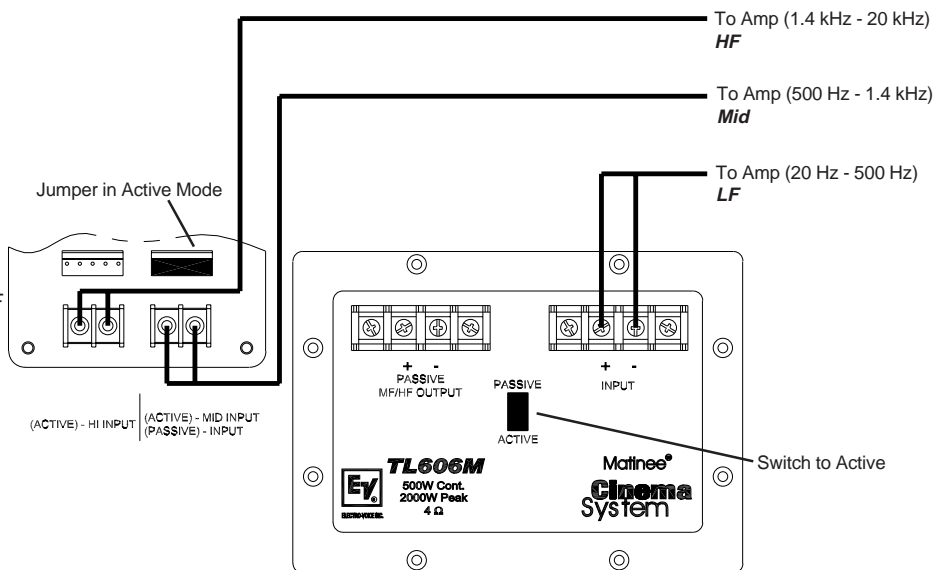

12000 Portland Avenue South, Burnsville, MN 55337
 Phone: 952/884-4051, Fax: 952/884-0043
www.electrovoice.com
 © Telex Communications, Inc. 7/2003
 Part Number 38110-282 Rev A

U.S.A. and Canada only. For customer orders, contact Customer Service at: **800/392-3497** Fax: **800/955-6831**
 Europe, Africa, and Middle East only. For customer orders, contact Customer Service at: **+ 49 9421-706 0** Fax: **+ 49 9421-706 265**
 Other International locations. For customer orders, contact Customer Service at: **+ 1 952 884-4051** Fax: **+ 1 952 736-4212**
 For warranty repair or service information, contact the Service Repair department at: **800/685-2606**
 For technical assistance, contact Technical Support at: **866/78AUDIO**

Specifications subject to change without notice.